


A. L. DON COMPANY



BOATSWAIN SEATS/CHAIRS

Chairs rigged, ready for use. Cleats fastened to underside for added strength. Bored with 1" holes for rigging. Sizes: 8" x 24" and 10" x 24"

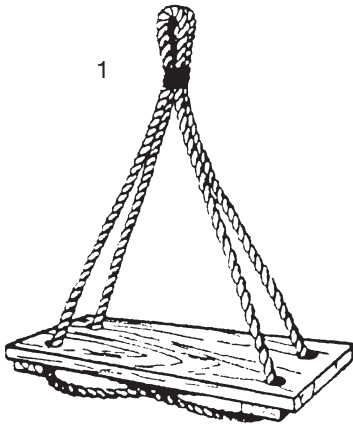


HAND FIDS

6" x 1-3/8"	16" x 2"
8" x 1-12/16"	18" x 2"
10" x 1-1/2"	18" x 3"
12" x 1-3/4"	20" x 2-1/4"
14" x 1-3/4"	24" x 3"




STANDING FIDS

24" x 4"
30" x 4"
36" x 6"



WOOD PLUGS


Specify top and bottom diameters.




LADDER RUNGS

1-1/4" x 12"	1-3/8" x 16"
1-1/4" x 14"	1-3/8" x 18"

Sizes measured inside of grooves. Made from ash hardwood.

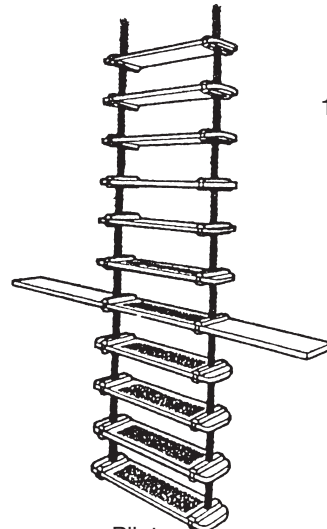

Pilot Ladder 11

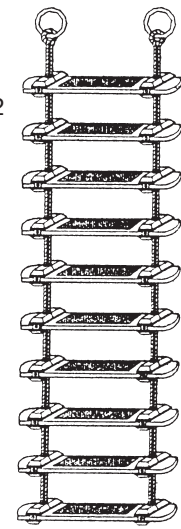

Debarkation Ladder 12

U.S.C.G. APPROVED SOLAS REGULATION PILOT LADDERS AND DEBARKATION LADDERS


With in-Place Replaceable Steps

U.S. Coast Guard approved and manufactured to meet or exceed all SOLAS regulations and IMO standards. Steps are international safety orange, with special non-skid surface. All steps easily withstand over 700 lbs. with less than 3/4" deflection. Ropes are polypropadacron with white outer jacket and safety orange core. Special patented design makes the steps completely replaceable without restringing the entire ladder and able to withstand the impact of pilot boat against the hull. All steps and spreaders are branded with manufacturer's name and USCG approval.

- DJM-I Pilot Ladder Wood & Synthetic Steps
- DJM-II Pilot Ladder All Synthetic Steps
- ERIK-I Debark, Ladder All Wood Steps
- ERIK-II Debark, Ladder All Synthetic Steps


SOLAS-PLUS Pilot Ladder Erik-Plus Embark/Debark Ladder

For use where USCG approval is not required, these ladders meet and exceed all SOLAS Regulations and IMO standards with the same patented design as in the USCG-approved ladders above. Replaceable steps, non-skid grit surface, and synthetic polypro-dacron rope.




BOATS POLES

Made from ash hardwood 1-1/2" dia. x 8' thru 16' long. With or without galvanized or aluminum ball points.



SYNTHETIC BOAT OARS


Accepted for use on U.S.C.G. approved lifeboats. Sizes: 8' to 16'.



HEARTS FOR FLAT STEPS


Size: 2" wide, 2-3/4" long, 1-3/16" thick.

Grooved to match holes in 4-1/2" flat ladder steps.

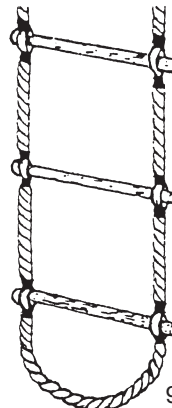

ROUND RUNG LADDER

ROUND RUNGS: 1-1/4" x 14"
ROPE - 5/8" Dia. Manila.
Length as required.



PYROTECHNIC CHESTS

Constructed of 1/8" steel plate, welded, wood lined. Inside dimensions 24" long, 24" wide, 19" deep. Approximately 6-13 cubic feet. Chest finished with gray deck paint.

A.L. Don Company

One Don Plaza, Dock Street, Matawan, NJ 07747
Tel: (732) 574-1441 • Fax: (732) 574-9191 • Toll Free: 1-800-458-5722
E-mail: sales@aldonladders.com • Web Site: <http://www.atlantic-group.com>

SOLAS Ladders
U.S.C.G. Approved Ladders
Flat Step Work Ladders
All Types of Ladder Steps and Components
Oars • Fids • Boat Poles